

# INSTALLATION GUIDE FOR



## IMPORTANT!!!
















This requires an exceptionally high acoustic insulation performance for which it is essential that all of the below guidance is adhered to and applied with the highest possible standard of workmanship.

**Products required:**

Isorubber FRB  
Isobond Adhesive

**Tools required:**

1.5mm (A2) Triangular Notched Trowel  
Roller  
Sharp 'Stanley' Type Knife  
Straight Edge

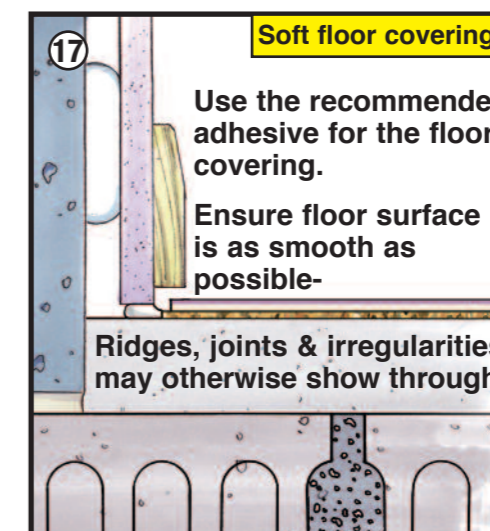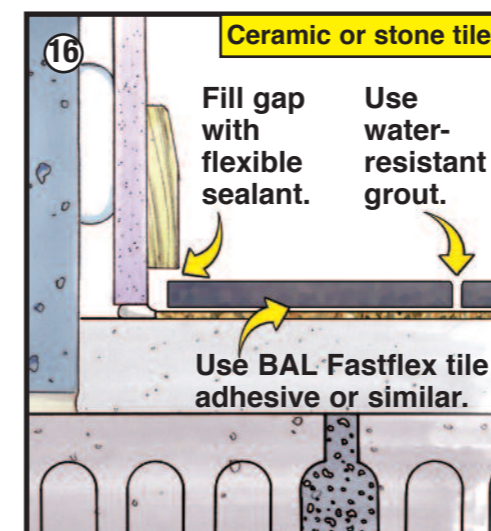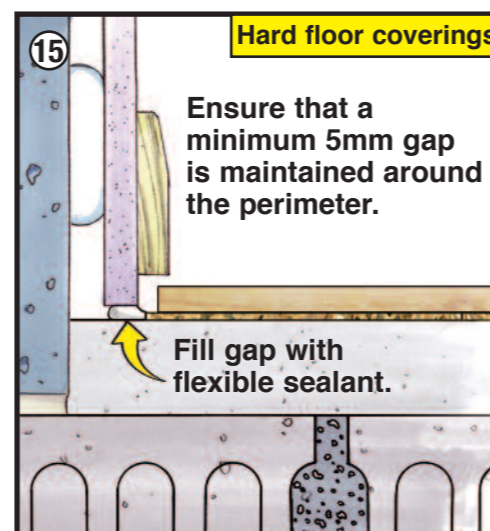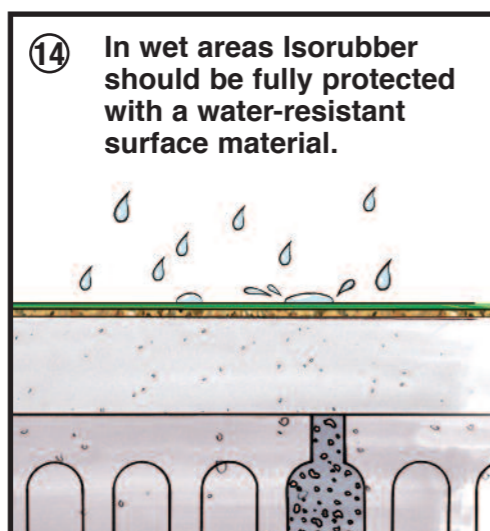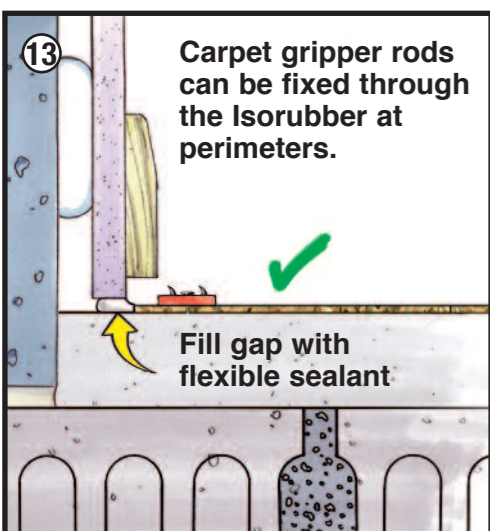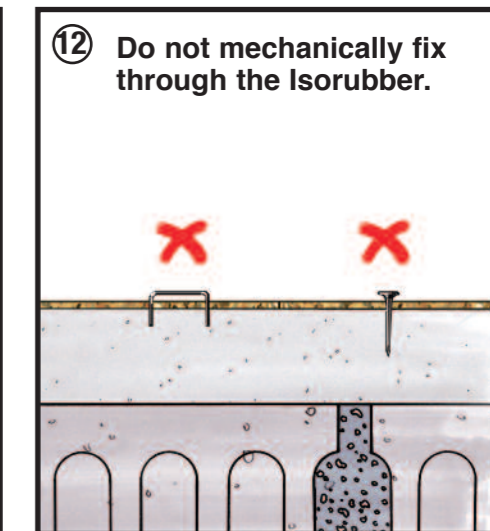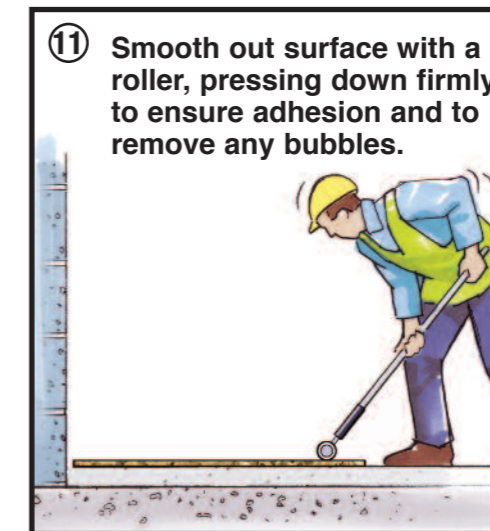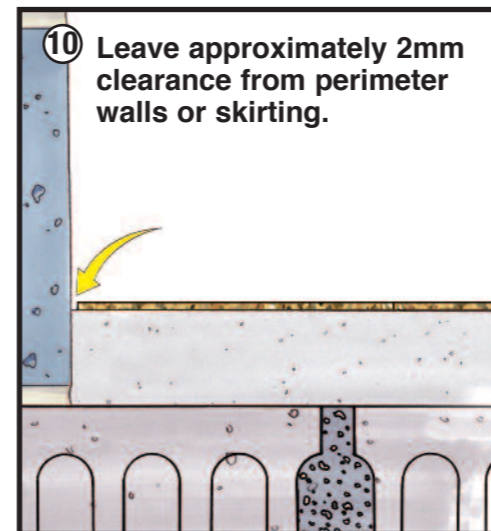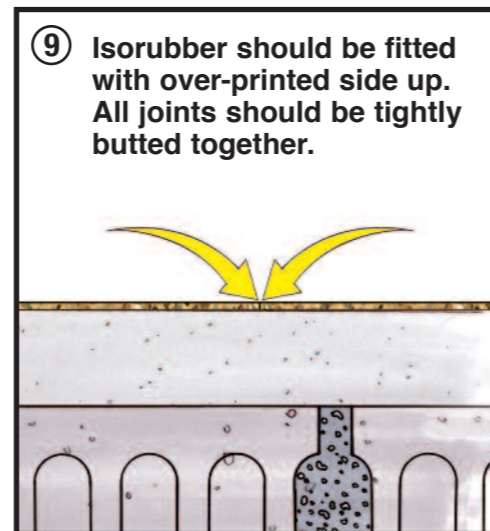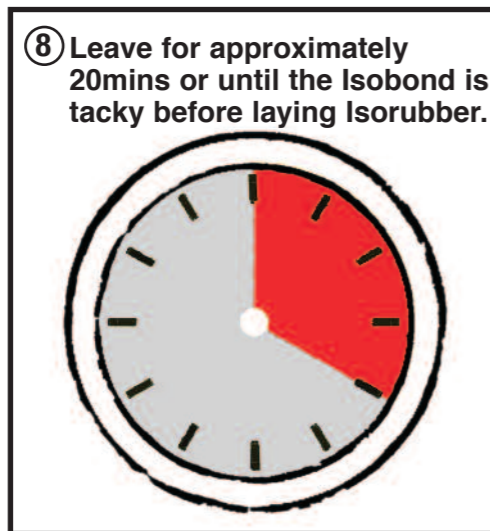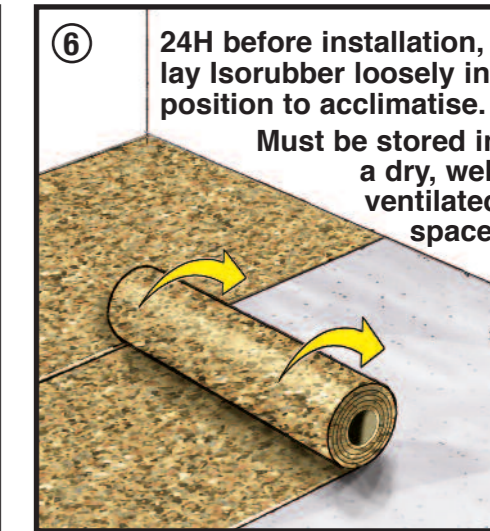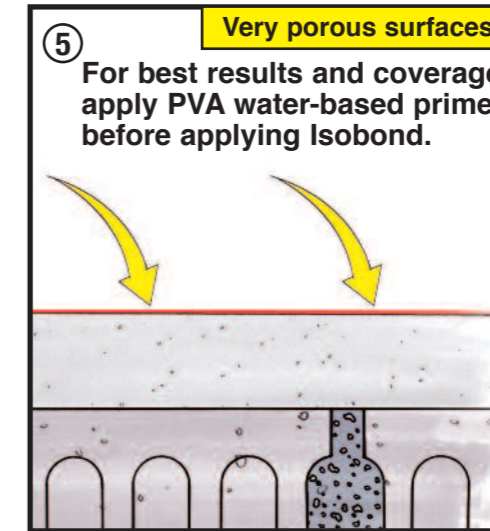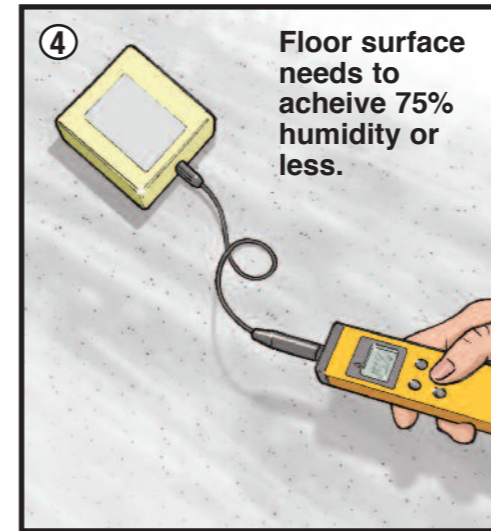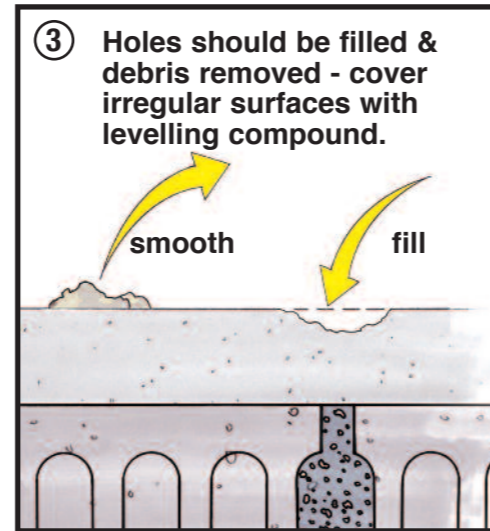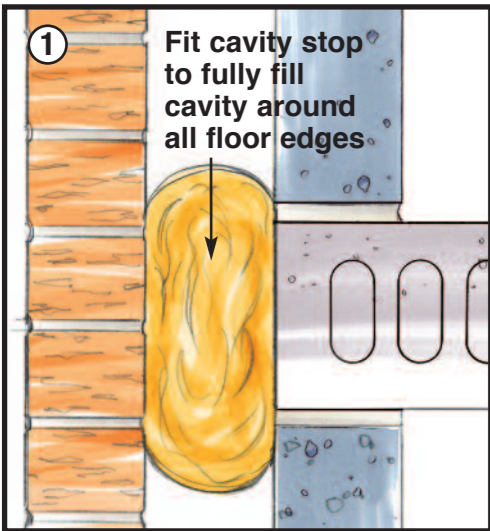

Tested to achieve a Reaction to Fire rating of B<sub>fl</sub>

**Product Data**  
Thickness : 2mm or 3mm  
Roll Size : 1m x 20m  
Tog Rating: 0.4 (3mm thickness)

Please visit our website for the full range of Thermal and Acoustic Insulation products at [www.thermal-economics.co.uk](http://www.thermal-economics.co.uk)