


# Isosonic Platform Floor™

FFT5 COMPLIANT RANGE OF PRODUCTS IN ACCORDANCE WITH A.D. "E" ROBUST DETAILS.

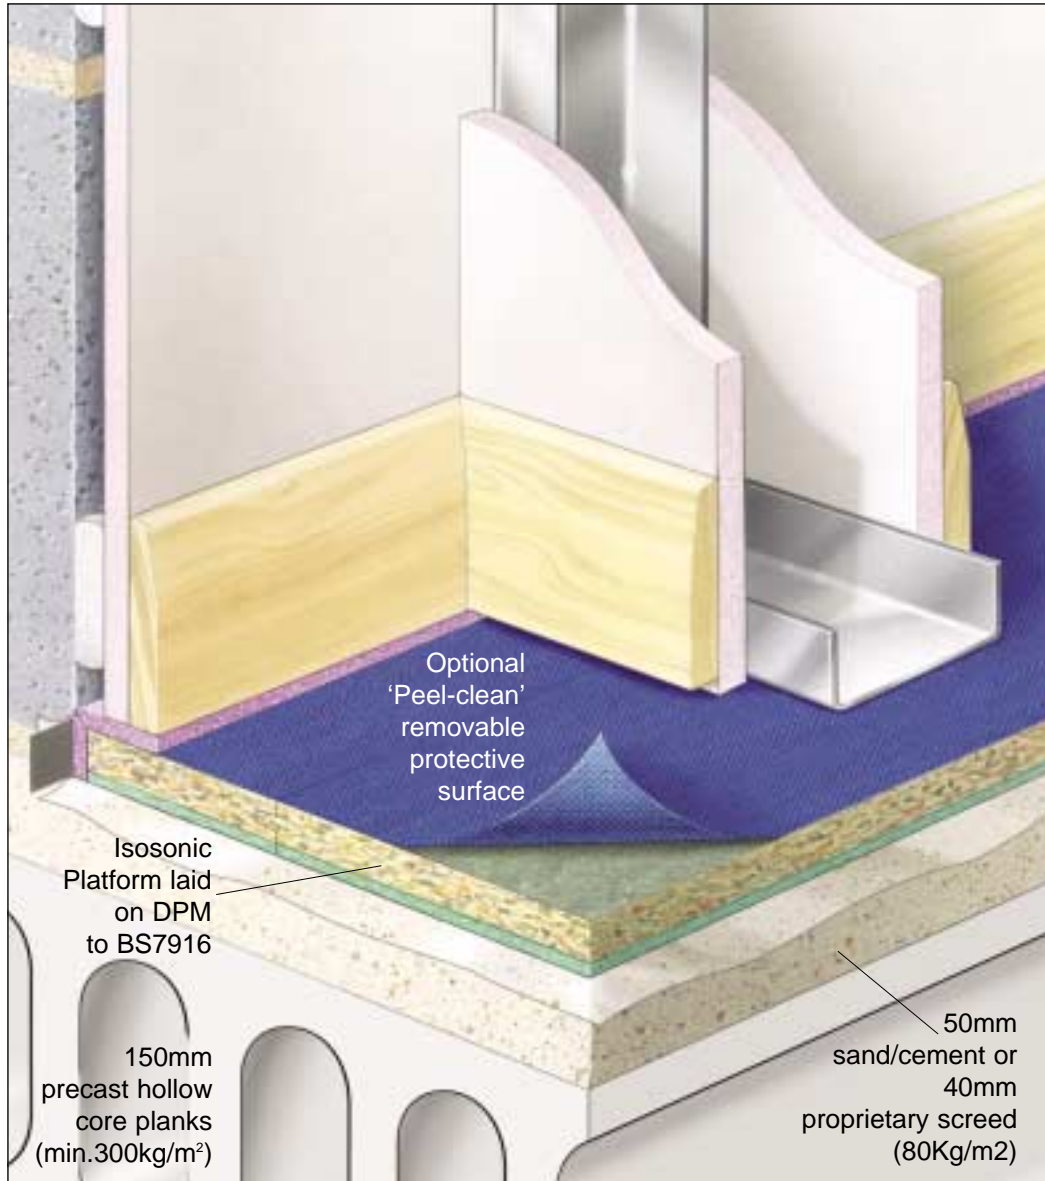

## APPROVED DOCUMENT E & RD COMPLIANT PRODUCT

The IsoSonic Platform range of products are fully RD compliant Resilient Overlay Shallow Platform Floor Systems (FFT5) for concrete base floors E-FC-1 & E-FC-2 (& steel floor E-FS-1)

- ▶ IsoSonic Platform Tested Performance in accordance with BS EN ISO 140-6 > 17dB and therefore require no Pre Completion Testing
- ▶ IsoSonic Platform Floor: 18mm P5 (V313) water resistant chipboard with 7mm prebonded acoustic backing (25mm total)
- ▶ Suitable for use beneath lightweight internal partitions
- ▶ A low cost FFT5 compliant product available ex-stock for national delivery
- ▶ Self-adhesive perimeter "Iso-Edge" foam strip available to suit
- ▶ Optional IsoSonic Platform Peel-Clean product available with removable protective surface. Standard IsoSonic Platform Floor available in standard 2400mm x 600mm and smaller 1200mm x 600mm. boards IsoSonic Platform Peel-Clean available in 2400mm x 600mm boards only

### Further Information

Please refer to Robust Details Ltd publication "Resistance to the passage of Sound" for guidance regarding:

- 1 Options for ceiling detail;
  - 2 Flanking wall construction;
  - 3 Guidance for junctions between elements;
- For copies of Approved Documents and consultation papers please refer to the "legislation" section on our web site.

## ISOSONIC PLATFORM

Measure	Large Format	Small Format
Thickness	25mm	25mm
Board size	2400 x 600mm	1200 x 600mm
Weight	19Kg (13.2Kg/m <sup>2</sup> )	9.5Kg (13.2Kg/m <sup>2</sup> )
Packaging	Single Boards	3 boards shrink wrapped
Pallet	84 boards (121m <sup>2</sup> )	32 packs (69.12m <sup>2</sup> )



Thermal Economics Ltd Thermal House 8 Cardiff Road Luton Bedfordshire LU1 1PP

Tel:01582 450814 Fax:01582 429305 E-mail:info@thermal-economics.co.uk Web:www.thermal-economics.co.uk